

309

temperature - pressure  
relief valve



**WRAS**  
APPROVED  
PRODUCT



**altecnic**

# 309 temperature - pressure relief valves



## Application

The Altecnic 309 temperature - pressure relief valves are used to control and limit the temperature and pressure of hot water contained in a domestic storage cylinder, preventing the water from reaching 100°C.

When the set conditions are reached, the valve discharges a sufficient amount of water to allow the temperature or pressure to return within the system's operating limits.

The valves have been designed for use on unvented hot water systems.

## Construction Details

Component	Material	Grade
Body	DZR	BS EN 12165 CW602N
Stem	Brass	BS EN 12164 CW614N
Diaphragm	EPDM	
Spring	Steel	BS EN 10270-1 SH
Control Knob	PA6GF Polymer	

Product Code	Size	Set Pressure bar	Set Temperature °C
309440 CST	1/2"	4	90
309470 CST	1/2"	7	90
309400 CST	1/2"	10	90
309500 CST	3/4"	10	90
309570 CST	3/4"	7	90
309473 CST	1/2"	7	90

## CE Mark

The 309 range of temperature - pressure relief valves meet the requirements of the European Directive 97/23/CE for pressurised equipment often referred to as PED.

They are therefore classified in Category IV and granted the CE Mark.

The 309 range are certified by Buildcert as complying with the requirements of BS EN 1490: 2000.

## E & O.E

Altecnic Ltd Mustang Drive, Stafford, Staffordshire ST16 1GW


T: +44 (0)1785 218200 E: sales@altecnic.co.uk

Registered in England No: 2095101

altecnic.co.uk

AL 041 2-07-11

## Dimensions

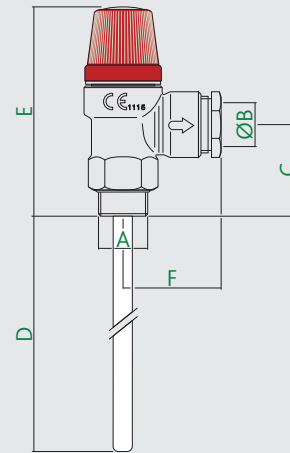

Prod Code	A	B	C	D	E	F	kg
3094.. CST	G1/2B	15	40	102	88	39	0.26
3095.. CST	G3/4B	22	43	99	91	39	0.31

## Technical Data

Medium:	water
Max pressure:	10 bar
Discharge rating:	1/2" 10 kW 3/4" 25 kW
Set temperature:	90°C
Set pressures available:	4, 7 & 10 bar
PED category:	IV
WRAS approved product	

## Typical Applications

