

MULTIFLOW⁺

Thermal Store Range

Providing Mains Pressure Hot Water



McDonald
Water Storage
Hot Water Storage Solutions



Thermal Store Range Providing Mains Pressure Hot Water

Our new MULTIflow+ thermal store range is an extension to our MULTIflow range, providing a mains pressure hot water solution, but with the additional benefits including bespoke design flexibility to suit the installation requirements.

Our thermal store approach can suit multiple installation applications, including electric, boiler or central plant inputs to meet hot water demand.

With our unique design and manufacturing solution, we can offer significant cost savings both during installation and ongoing running costs.

CONTENTS

MULTIflow+ OV

Compatible with Open Vented Boiler

MULTIflow+ SB

Compatible with Sealed Boiler or
Central Plant Boiler

MULTIflow+ Slimline



Discover The Benefits Of **MULTIflow+** Thermal Stores

- No costly pumps and electronic controls required - providing piping hot water even during a power outage
- Delivers mains pressure hot water with scald protection and inherent safety of an open vented system
- Bespoke tapping positions available to suit installation, with slimline options of 450mm and 500mm diameter
- No discharge pipework – flexibility for installation position
- Fit and forget solution – with no G3 certification required
- Being copper provides complete peace of mind, killing 99% of bacteria and no risk of Legionella as the hot water is instantaneously heated




Why MULTIflow+?

Manufactured from premium grade copper, our MULTIflow+ mains pressure hot water system delivers unrivalled performance thanks, in part, to copper's superior thermal transfer properties.

One of our key advantages is the extra long finned copper coil which we incorporate into every MULTIflow+ cylinder. This ensures greater flow rates, improves efficiency and reduces ongoing costs.

This means our MULTIflow+ thermal store cylinder is designed to achieve a consistently high water temperature due to a combination of our unique design and copper's increased efficiency.

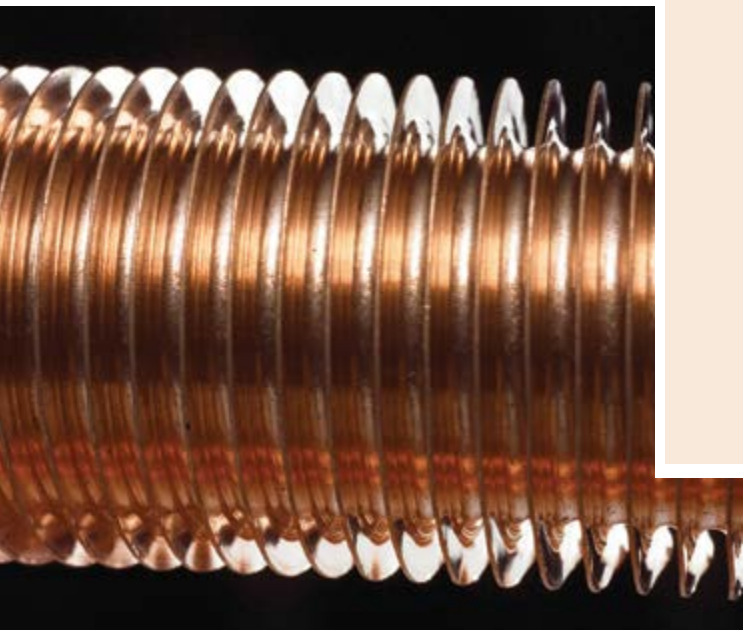



Open Vented Boiler Compatible

The MULTIfLOW+ is a direct thermal store, with the flexibility to be bespoke designed to suit the installation requirements and also incorporate an open vented boiler, to provide mains pressure hot water.

This multi-application thermal store, with integrated F&E tank, can be used with an open vented boiler and/or off-peak electricity to aggregate the supply to heat the store, and provide domestic hot water when it is required, keeping running costs for the householder down to a minimum.

Being open vented it is inherently safe, and therefore does not require any discharge pipework associated with unvented cylinders, which can prove problematic in apartment installations.

The design of the MULTIfLOW+ also means there is no requirement for costly pumps or additional electronic controls to produce the hot water.



COMPONENTS

1. 15mm Ball Valve & Float
2. 22mm Hot Draw Out (c/w TMV)
3. Expansion Chamber
4. 22mm Cold Mains In
5. Top (On Peak) Immersion
6. Bottom (Off Peak) Immersion
7. 1/2" Drain
8. 22mm Boiler Flow
9. 22mm Boiler Return
10. Boiler Control Thermostat Pocket
11. 22mm Overflow
12. 2" Dial Temperature Gauge

KEY BENEFITS

- Compatible with open vented boiler
- Maximises the benefit of off-peak electricity supply
- No discharge pipework
- No annual maintenance
- No G3 certification required for installation
- Incorporated automatic fill F&E tank
- Replacement solution for discontinued PulsaCoil and Albion Mainsflow products

Model No.	TMFP1200V	TMFP1500V	TMFP1800V	TMFP2100V	TMFP2500V	TMFP3000V
Storage Capacity	120	150	180	210	250	300
ERP Class	C	C	C	C	C	C
Standing Heat Loss (watts)	49	55	59	65	72	80
Height	1130	1300	1500	1700	1700	2050
Diameter	550	550	550	550	600	600
Bedrooms	1	1-2	2-3	2-3	3	3-4
Baths & Showers	1	1	2	2	2	2

Sizes shown above are indicative only, including 50mm insulation and combined F&E tank. Other sizes are available to suit the installation requirements.



Sealed/Central Plant Boiler Compatible

The MULTIfLOW+ is an indirect thermal store, with the flexibility to be bespoke designed to suit the installation requirements and also incorporate a sealed boiler or central plant boiler, to provide mains pressure hot water.

This multi-application thermal store, with integrated F&E tank, can be used with a sealed or central plant boiler and/or off-peak electricity to aggregate the supply to heat the store, keeping running costs for the householder down to a minimum.

Being open vented, the store does not require any discharge pipework associated with unvented cylinders, and the design of the MULTIfLOW+ also means there is no requirement for costly pumps or additional electronics.

Where utilised in central plant applications, it provides additional benefits including;

- enable central plant to be turned off in summer
- immersion back up if central boiler fails



COMPONENTS

1. 15mm Ball Valve & Float
2. 22mm Hot Draw Out (c/w TMV)
3. Expansion Chamber
4. 22mm Cold Mains In
5. Bottom (Off Peak) Immersion
6. 1/2" Drain
7. 22mm Boiler Flow
8. 22mm Boiler Return
9. Boiler Control Thermostat Pocket
10. 22mm Overflow
11. 2" Dial Temperature Gauge

KEY BENEFITS

- Compatible with sealed system or central plant boiler
- Maximises the benefit of off-peak electricity supply
- No discharge pipework
- No annual maintenance
- No G3 certification required for installation
- Incorporated automatic fill F&E tank
- Replacement solution for discontinued PulsaCoil and Albion Mainsflow products

Model No.	TMFP120SB	TMFP150SB	TMFP180SB	TMFP210SB	TMFP250SB	TMFP300SB
Storage Capacity	120	150	180	210	250	300
ERP Class	C	C	C	C	C	C
Standing Heat Loss (watts)	49	55	59	65	72	80
Height	1130	1300	1500	1700	1700	2050
Diameter	550	550	550	550	600	600
Bedrooms	1	1-2	2 - 3	2 - 3	3	3 - 4
Baths & Showers	1	1	2	2	2	2

Sizes shown above are indicative only, including 50mm insulation and combined F&E tank. Other sizes are available to suit the installation requirements.



Slimline Models

The MULTIfLOW+ is an indirect thermal store, with integrated F&E tank, has the flexibility to be bespoke designed to suit the installation requirements and also incorporate either an open vented boiler, sealed boiler or central plant boiler, to provide mains pressure hot water.

One of the main benefits of the MULTIfLOW+ is the flexibility of a range of slimline models, to suit restricted space availability.

The units are available in two diameters, either 450mm for 120 and 150 litre models and 500mm for 180 and 210 litre models. However, the height can be specified to suit the installation requirement (with cylinder volume adjusted accordingly).

Model No.	TMFP120OVSL	TMFP150OVSL	TMFP180OVSL	TMFP210OVSL
Storage Capacity	120	150	180	210
ERP Class	C	C	C	C
Standing Heat Loss (watts)	64	72	78	84
Height	1650	2050	1850	2100
Diameter	450	450	500	500
Bedrooms	1	1-2	2 - 3	2 - 3
Baths & Showers	1	1	2	2

Model No.	TMFP120SBSL	TMFP150SBSL	TMFP180SBSL	TMFP210SBSL
Storage Capacity	120	150	180	210
ERP Class	C	C	C	C
Standing Heat Loss (watts)	64	72	78	84
Height	1650	2050	1850	2100
Diameter	450	450	500	500
Bedrooms	1	1-2	2 - 3	2 - 3
Baths & Showers	1	1	2	2

Sizes shown above are indicative only, including 50mm insulation and combined F&E tank.

Discover Our Complete Range Of Hot Water Storage Solutions

Thermal Stores

Unvented Cylinders

Elson Replacement Solutions

Open Vented and Combination Cylinders

Commercial Cylinders

Bespoke Design and Manufacture



For full details on a product range
click on the category above or
go to mcdonaldwaterstorage.com



McDonald Water Storage

Hot Water Storage Solutions

Pride in our
service, quality
and tradition



QUEENSWAY INDUSTRIAL ESTATE | GLENROTHES | FIFE | KY7 5QF

T: 01592 611123 | E: sales@mcdonaldwaterstorage.com

www.mcdonaldwaterstorage.com

